

FORM PTO-1300 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

216009US3PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/926690

INTERNATIONAL APPLICATION NO.
PCT/JP00/03475INTERNATIONAL FILING DATE
30 May 2000PRIORITY DATE CLAIMED
2 June 1999

TITLE OF INVENTION

PAPERMAKING MOLD

APPLICANT(S) FOR DO/EO/US

OTANI Kenichi et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:


13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Request for Priority/Drawings (8 sheets)

PCT/IB/308/Form PTO-1449

PCT/IB/304

Letter Requesting Approval of Drawing Changes (with attachment)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.131(a)) 09/926690		INTERNATIONAL APPLICATION NO. PCT/JP00/03475		ATTORNEY'S DOCKET NUMBER 216009US3PCT	
24. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than _____ months from the earliest claimed priority date (37 CFR 1.492 (e)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	10 - 20 =	0	x \$18.00	\$0.00	
Independent claims	2 - 3 =	0	x \$84.00	\$0.00	
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$890.00	
Processing fee of \$130.00 for furnishing the English translation later than _____ months from the earliest claimed priority date (37 CFR 1.492 (f)). <input type="checkbox"/> 20 <input type="checkbox"/> 30				\$0.00	
TOTAL NATIONAL FEE =				\$890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$890.00	
				Amount to be refunded	\$
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$890.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 15-0030 . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: <div style="border: 1px solid black; padding: 10px; margin: 10px 0;"> WILLIAM E. BEAUMONT REGISTRATION NUMBER 30,996  22850 </div> <div style="margin-top: 10px;"> C. Irvin McClelland NAME 21,124 REGISTRATION NUMBER December 3, 2001 DATE </div>					

216009US

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF :
KENICHI OTANI ET AL : ATTN: APPLICATION DIVISION
SERIAL NO: NEW U.S. PCT APPLN :
(Based on PCT/JP00/03475)
FILED: HEREWITH :
FOR: PAPERMAKING MOLD :

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified application as follows:

IN THE SPECIFICATION

Page 4, please replace the paragraph at lines 11-18 with the following:

The net 15 is provided along the surface of the papermaking part 11 and the peripheral part 13. The net 15 is shaped in conformity to the contour of a vertical half of a molded article to be produced. The net 15 is made of wire of metal, synthetic resin, etc. The opening size is usually about 10 to 100 mesh (JIS L-0208). The net 15 may have a single layer structure, a knitted structure, or a composite structure composed of two or more net layers. A porous material having a large number of permeating pores which is formed by electroforming can be used as the net 15, in which case the diameter of the permeating pores is about 0.05 to 2 mm.

Page 5, please replace the paragraph at lines 19-27 with the following:

The material composing the fixing member 16 is not particularly limited. As stated above, the papermaking mold 10 of the present embodiment is used as paired, and a pair of the molds 10 are mated such that the papermaking parts 11 face each other, i.e., the fixing members 16 are brought into contact with each other. Therefore it is preferred for ensuring tight contact that the fixing member 16 be capable of elastic deformation or plastic deformation. The fixing member 16 which is capable of elastic deformation is made of elastic materials, such as silicone rubber and epoxy resins, and the fixing member 16 which is capable of plastic deformation is made of metal or plastic materials, such as polyethylene and polypropylene.

Please replace the paragraph bridging pages 11 and 12 with the following:

The papermaking mold 101 can be used, for example, in the method of producing a pulp molded article shown in Figs. 6(a) through (d). As shown in Fig. 6(a), a pair of papermaking molds 101 and 101 are joined together with the papermaking parts 120a facing each other to mate the mating surfaces 121a. A cavity C of a prescribed shape is thus formed by the two papermaking parts 120a. A pulp slurry is injected into the cavity C through an opening connecting to the cavity C. In this state, the auxiliary sealing members 130 having an elastic force are in intimate contact with each other, but the mold clamping force is exerted on the mating surfaces 121a so that the nets 103 do not directly receive such a force as to damage the nets 103. As a result, the peripheral covering part of the net undergoes substantially no deformation and can be protected from damage in repeated papermaking operation.

Page 14, please replace the paragraph at lines 15-28 with the following:

In the papermaking mold 101' of the embodiment shown in Fig. 10, an alteration is made to the position where to dispose the sealing member on the surface to be mated on mold clamping so that the peripheral covering part 103a of the papermaking net 103 may be disposed such that it would not be deformed under the mold clamping force. That is, a mating member 125 is provided outside the frame 104. It is not the upper side 121a of the flange 121 but the upper edge side 125a of the mating member 125 that serves as a surface to be mated on mold clamping. The side 125a has a groove 125b, in which a sealing member 125c is fixedly fitted. The upper side 121a of the flange 121 is lower than the upper edge side 125a of the mating member 125. On mold clamping, two mating nets 103 come into contact at their peripheral covering parts 103a, while the clamping force is received by the mating upper edge sides 125a. As a result, the net 103 does not directly receive the clamping force. Further, since the shock of contact is relaxed by the auxiliary sealing member 130, damage from the friction between the mating nets 103 is also reduced.

Page 15, please replace the paragraph at lines 19-25 with the following:

With this structure, even after the papermaking net 103 is fixed, the molding clamping force can easily be adjusted so that the peripheral covering part 103a of the papermaking net 103 is not deformed and that the peripheral covering part 103a (or an auxiliary sealing member 130 if provided on the peripheral covering part 103a) may secure tight seal to provide a flash-free molded article. Having the depression 126e and the projection 127e, the structure makes it possible to carry out positioning with good accuracy in clamping the molds.

IN THE DRAWINGS

Approval of the attached proposed drawing changes to Fig. 6(a) is respectfully requested.

IN THE ABSTRACT

Please amend the Abstract as follows:

A papermaking mold which includes a papermaking part of a prescribed shape, a peripheral part extending outward from the peripheral edge of the papermaking part, and a net covering the papermaking part and at least part of the peripheral part. A fixing member is disposed on the periphery of the net, and the fixing member is fixed to the peripheral part to fix the net by the fixing member.

REMARKS

Favorable consideration of this application, as presently amended, is respectfully requested.

The present Preliminary Amendment is submitted to place the above-identified application in more proper format under United States practice.

By the present Preliminary Amendment the specification has been amended to correct for minor informalities. The changes made to the specification are deemed to be self-evident from the original disclosure, and thus are not deemed to raise any issues of new matter.

Proposed drawing changes are submitted with this response to correct for an informality in Figure 6(a) by now labelling element 120a therein.

The Abstract has been amended by the present response to no longer recite any legal phraseology or reference numerals.

The present application is believed to be in condition for a full and through examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Gregory J. Maier
Attorney of Record
Registration No. 25,599
Surinder Sachar
Attorney of Record
Registration No. 34,423



22850

(703) 413-3000
Fax No.: (703) 413-2220
GJM/SNS:kst
I:\atty\SNS\216009us-pr.wpd

Marked-Up Copy

Serial No:

Amendment Filed on:

12-3-2001

IN THE SPECIFICATION

Page 4, please replace the paragraph at lines 11-18 with the following:

--The net 15 is provided along the surface of the papermaking part 11 and the peripheral part [11] 13. The net 15 is shaped in conformity to the contour of a vertical half of a molded article to be produced. The net 15 is made of wire of metal, synthetic resin, etc. The opening size is usually about 10 to 100 mesh (JIS L-0208). The net 15 may have a single layer structure, a knitted structure, or a composite structure composed of two or more net layers. A porous material having a large number of permeating pores which is formed by electroforming can be used as the net 15, in which case the diameter of the permeating pores is about 0.05 to 2 mm.--

Page 5, please replace the paragraph at lines 19-27 with the following:

--The material composing the fixing member 16 is not particularly limited. As stated above, the papermaking mold 10 of the present embodiment is used as paired, and a pair of the molds 10 are mated such that the papermaking parts [13] 11 face each other, i.e., the fixing members 16 are brought into contact with each other. Therefore it is preferred for ensuring tight contact that the fixing member 16 be capable of elastic deformation or plastic deformation. The fixing member 16 which is capable of elastic deformation is made of elastic materials, such as silicone rubber and epoxy resins, and the fixing member 16 which is

capable of plastic deformation is made of metal or plastic materials, such as polyethylene and polypropylene.--

Please replace the paragraph bridging pages 11 and 12 with the following:

--The papermaking mold 101 can be used, for example, in the method of producing a pulp molded article shown in Figs. 6(a) through (d). As shown in Fig. 6(a), a pair of papermaking molds 101 and 101 are joined together with the papermaking parts 120a facing each other to mate the mating surfaces 121a. A cavity C of a prescribed shape is thus formed by the two papermaking parts 120a. A pulp slurry is injected into the cavity C through an opening connecting to the cavity C. In this state, the auxiliary sealing members 130 having an elastic force are in intimate contact with each other, but the mold clamping force is exerted on the mating surfaces [121] 121a so that the nets 103 do not directly receive such a force as to damage the nets 103. As a result, the peripheral covering part of the net undergoes substantially no deformation and can be protected from damage in repeated papermaking operation.--

Page 14, please replace the paragraph at lines 15-28 with the following:

--In the papermaking mold 101' of the embodiment shown in Fig. 10, an alteration is made to the position where to dispose the sealing member on the surface to be mated on mold clamping so that the peripheral covering part [103b] 103a of the papermaking net 103 may be disposed such that it would not be deformed under the mold clamping force. That is, a mating member 125 is provided outside the frame 104. It is not the upper side 121a of the flange 121 but the upper edge side 125a of the mating member 125 that serves as a surface to be mated on mold clamping. The side 125a has a groove 125b, in which a sealing member 125c is fixedly fitted. The upper side 121a of the flange 121 is lower than the upper edge side 125a of the mating member 125. On mold clamping, two mating nets 103 come into contact

at their peripheral covering parts 103a, while the clamping force is received by the mating upper edge sides 125a. As a result, the net 103 does not directly receive the clamping force. Further, since the shock of contact is relaxed by the auxiliary sealing member 130, damage from the friction between the mating nets 103 is also reduced.--

Page 15, please replace the paragraph at lines 19-25 with the following:

--With this structure, even after the papermaking net 103 is fixed, the molding clamping force can easily be adjusted so that the peripheral covering part 103a of the papermaking net 103 is not deformed and that the peripheral covering part 103a (or an auxiliary sealing member 130 if provided on the peripheral covering part [103b] 103a) may secure tight seal to provide a flash-free molded article. Having the depression 126e and the projection 127e, the structure makes it possible to carry out positioning with good accuracy in clamping the molds.--

IN THE ABSTRACT OF THE DISCLOSURE

Please amend the Abstract as follows:

--A papermaking mold [(10)] which [comprises] includes a papermaking part [(11)] of a prescribed shape, a peripheral part [(13)] extending outward from the peripheral edge of the papermaking part [(11)], and a net [(15)] covering the papermaking part [(11)] and at least part of the peripheral part [(13), wherein a] A fixing member [(16)] is disposed on the periphery of the net [(15)], and the fixing member [(16)] is fixed to the peripheral part [(13)] to fix the net [(15)] by the fixing member [(16)].--

8/1989

09/926690

JOS. H. H. H. 03 DEC 2001

1

DESCRIPTION

PAPERMAKING MOLD

Technical Field:

The present invention relates to a papermaking mold used to produce pulp
5 molded articles.

Background Art:

A papermaking mold used to manufacture pulp molded articles usually has a net
on the inner surface of its papermaking part. The net is generally fixed to the mold by
welding or with metal wire, etc. Otherwise, the net would move out of a prescribed
10 position during papermaking by the pressure or the flow of a pulp slurry injected, etc.,
which results in a failure to obtain a molded article of a desired shape or results in a
non-uniform thickness of the resulting molded article.

As a mold with a net is used repeatedly for producing molded articles, pulp fiber
is adhered and accumulated on the net to cause unevenness in thickness of molded
15 articles or impair the appearance of molded articles. Thus, it is necessary for the net to
be removed and cleaned. However, where the net is fixed by welding, it is not easy to
remove the net. Where it is fixed with wire, etc., removal is possible but laborious.

In a conventional papermaking mold, a mold clamping force is applied to the
peripheral part of the mold where the papermaking net is disposed so that the force is
20 directly exerted on the net. As a result, the net is deformed on clamping and gradually
damaged from repetition of papermaking and eventually needs an exchange. Where,
in particular, a wet preform after papermaking and dewatering is transferred from the
papermaking mold to a drying mold by purging with compressed air and suction, the
frequency of mold opening and closure increases, and the part of the net which covers
25 the peripheral part of the mold which extends outward from the papermaking part
suffers considerable damage. This problem occurs in conjunction with the above-
mentioned difficulty of net exchange where the net is fixed to the mold by welding or
with wire, etc. Therefore a papermaking mold of which the net hardly suffers damage

from repeated use of the mold has been desired.

Accordingly, an object of the present invention is to provide a papermaking mold the net of which can be attached and detached with improved ease.

Another object of the present invention is to provide a papermaking mold which
5 reduces damage to the net thereof when used repeatedly.

Disclosure of the Invention:

The present invention accomplishes the above objects by providing a papermaking mold which comprises a papermaking part of a prescribed shape, a peripheral part extending outward from the peripheral edge of the papermaking part, and a net covering the papermaking part and at least part of the peripheral part, wherein
10 a fixing member is disposed on the periphery of the net, and the fixing member is fixed to the peripheral part to fix the net by the fixing member.

The present invention also accomplishes the above objects by providing a papermaking mold which comprises a papermaking part of a prescribed shape, a
15 peripheral part extending outward from the papermaking part, and a papermaking net covering the papermaking part and at least part of the peripheral part, wherein the part of the net which covers the peripheral part is disposed in the site where it does not receive a mold clamping force or it is not damaged by a mold clamping force.

Brief Description of the Drawings:

20 Fig. 1 is a perspective of a papermaking mold with no net disposed.

Fig. 2 is a cross-section of the papermaking mold shown in Fig. 1 and a net which is about to be attached thereto.

Fig. 3(a) schematically shows the step of injecting a pulp slurry followed by dewatering. Fig. 3(b) schematically shows the step of inserting a pressing member.
25 Fig. 3(c) schematically shows the step of pressing and dewatering. Fig. 3(d) schematically shows the step of removal from the mold.

Fig. 4 is an exploded perspective of a papermaking mold according to a second embodiment of the present invention, which is used to produce pulp molded articles, with a part cut away.

Fig. 5 schematically shows the cross-sectional structure of the papermaking mold.

Fig. 6(a) schematically shows the step of injecting a pulp slurry followed by dewatering. Fig. 6(b) schematically shows the step of inserting a pressing member. Fig. 6(c) schematically shows the step of pressing and dewatering. Fig. 6(d) schematically shows the step of removal from the mold.

Fig. 7 schematically shows the cross-sectional structure of a papermaking mold according to another embodiment of the present invention which is used to produce a pulp molded article (equivalent to Fig. 5).

Fig. 8 schematically shows the cross-sectional structure of a papermaking mold according to another embodiment of the present invention which is used to produce a pulp molded article (equivalent to Fig. 5).

Fig. 9 schematically shows the cross-sectional structure of a papermaking mold according to another embodiment of the present invention which is used to produce a pulp molded article (equivalent to Fig. 5).

Fig. 10 schematically shows the cross-sectional structure of a papermaking mold according to still another embodiment of the present invention which is used to produce a pulp molded article (equivalent to Fig. 5).

Fig. 11 is a schematic cross-sectional view of the main part of a papermaking mold in its clamped state according to yet another embodiment of the present invention, which is used for producing a pulp molded article.

Best Mode for Carrying out the Invention:

The present invention will be described based on the preferred embodiments with reference to the accompanying drawings.

Figs. 1 and 2 illustrate a first embodiment of the present invention. As shown in these figures, the papermaking mold 10 according to the first embodiment has a first member 1 and a second member 2. The first member 1 has a papermaking part 11. The papermaking part 11 has a concavity. The papermaking part 11 has a large number of through-holes 12 pierced therethrough to connect the surface and the reverse thereof. The peripheral edge of the papermaking part 11 extends outward horizontally to form a peripheral part 13. The edges of the peripheral part 13 form a rectangle in its plan view. A continuous groove 14 is made on the peripheral part 13 near and along

the edges. The groove 14 is used as a depression mating with a projection 17 hereinafter described. The part of the peripheral part 13 near the papermaking part 11 and the whole papermaking part 11 are covered with a net 15.

The second member 2 has a box shape. When the first member 1 is fitted into the second member 2, there is formed a prescribed space 3 between the first member 1 and the second member 2. The second member 2 has a through-hole 4, which is connected to a prescribed suction means (not shown) in carrying out papermaking. Thus, the through-holes 12, the space 3, and the through-hole 4 connect with each other to form an interconnecting passage from the outside of the mold 10 to the inside of the papermaking part 11.

The net 15 is provided along the surface of the papermaking part 11 and the peripheral part 11. The net 15 is shaped in conformity to the contour of a vertical half of a molded article to be produced. The net 15 is made of wire of metal, synthetic resin, etc. The opening size is usually about 10 to 100 mesh (JIS L-0208). The net 15 may have a single layer structure, a knitted structure, or a composite structure composed of two or more net layers. A porous material having a large number of permeating pores which is formed by electroforming can be used as the net 15, in which case the diameter of the permeating pores is about 0.05 to 2 mm.

With the net 15 fitted on the first member 1, the net 15 and the surface of the papermaking part 11 may be in close contact with each other. It is preferred, however, that the net 15 covers the papermaking part 11 with a prescribed clearance for preventing clogging by pulp fibers during papermaking and for improving papermaking efficiency.

The papermaking mold 10 according to the present embodiment is used as paired with another half in such a manner that the papermaking parts 11 of the pair face each other so that the facing papermaking parts 11 form a cavity of a prescribed shape.

A pulp slurry is injected into this cavity to deposit pulp fiber on the net. Accordingly, the pair to the papermaking mold 10, which is not illustrated, has the same structure.

The net 15 is provided with a fixing member 16 which covers the upper side of the part 15a of the net 15 that covers the peripheral part 13 (this part of the net 15 will hereinafter be referred to as a peripheral covering part) and also surrounds the edges of the net 15. That is, the fixing member 16 is composed of a first part 16a which covers the upper side of the peripheral covering part 15a and a second part 16b which adjoins and surrounds the edges of the net 15. The thickness of the second part 16b is equal to the sum of the thickness of the first part 16a and the thickness of the peripheral covering part 15a. The fixing part 16 is fixed onto the peripheral part 13 by a prescribed means whereby the net 15 is fixed by the fixing member 16. In this manner, there is no need to directly fix the net 15 itself, and the net 15 can be attached and detached with ease simply by fixing and removing the fixing member 16. In this embodiment, since the peripheral covering part 15a of the net 15 is entirely covered with the fixing member 16, the net 15 gains in strength and is thereby prevented from deformation and the like when attached or detached.

The fixing member 16 has, on its second part 16b, a projection 17 as a mating projection on its side facing the peripheral part 13. The projection 17 fits into the groove 14, a mating depression, whereby the fixing member 16 is fixed to the peripheral part 13.

The material composing the fixing member 16 is not particularly limited. As stated above, the papermaking mold 10 of the present embodiment is used as paired, and a pair of the molds 10 are mated such that the papermaking parts 13 face each other, i.e., the fixing members 16 are brought into contact with each other. Therefore it is preferred for ensuring tight contact that the fixing member 16 be capable of elastic deformation or plastic deformation. The fixing member 16 which is capable of elastic deformation is made of elastic materials, such as silicone rubber and epoxy resins, and the fixing member 16 which is capable of plastic deformation is made of metal or plastic materials, such as polyethylene and polypropylene.

The fixing member 16 may be either separate from or integral with the net 15. For strengthening the net 15, the fixing member 16 is preferably integral with the net 15. Where the fixing member 16 and the net 15 are integral with each other, it is

preferred that the fixing member 16 be integrally fixed to the peripheral covering part 15a. The fixing member 16 which is made of such a material as silicone rubber, an epoxy resin, etc. and is integral with the peripheral covering part 15a is obtained by, for example, press-bonding the material to the peripheral covering part 15a or coating or
5 impregnating the peripheral covering part 15a with the material. The fixing member 16 which is made of a metal and is integral with the peripheral covering part 15a is obtained by forming a prescribed metal shell on the peripheral covering part 15a by electroforming or a like method.

A pulp molded article is produced by the use of the papermaking mold of the present embodiment in accordance with the method shown in Figs. 3(a) through (d).
10 As shown in Fig. 3(a), a pair of molds 10 and 10 are mated together so that the papermaking parts 11 face each other to form a cavity 30 of a prescribed shape, which is contoured by the two papermaking parts 11. A pulp slurry is poured into the cavity 30 through an opening 31 connecting to the cavity 30. The molds 10 and 10 are sucked
15 from their outside and the pressure in the cavity 30 is reduced. As a result, the water content of the pulp slurry is sucked up, and the pulp fiber is deposited on the net (not shown) to form a water-containing preform 32.

On completion of pouring a prescribed amount of the pulp slurry, pouring is stopped, and the cavity 30 is completely sucked for dewatering. An inflatable hollow
20 pressing member 33 is inserted into the cavity 30 while continuing sucking and evacuating the cavity 30 as shown in Fig. 3(b). The pressing member 33 is made of an elastic material, such as urethane, fluororubber, silicone rubber or an elastomer, or a plastic material, such as polyethylene or polypropylene.

As shown in Fig. 3(c), a pressurizing fluid is fed into the pressing member 33 to
25 inflate the pressing member 33. The inflated pressing member 33 presses the wet preform 32 onto the net. The preform 32 pressed to the net by the pressing member 33, pressing and dewatering of the preform 32 proceed while the inner shape of the net is transferred to the preform 32. The pressurizing fluid used to inflate the pressing member 33 includes compressed air (heated air), oil (heated oil), and other various
30 liquids. The pressure for the pressurizing fluid feed is preferably 0.01 to 5 MPa,

particularly 0.1 to 3 MPa.

After the preform 32 is pressed and dewatered to a prescribed water content, and after the inner shape of the cavity 30 is sufficiently transferred to the preform 32, the pressurizing fluid is withdrawn from the pressing member 33 to shrink the pressing member 33 as shown in Fig. 3(d). The shrunken pressing member 33 is taken out of the cavity 30, and the molds are opened to remove the preform 32 having been pressed and dewatered to a prescribed water content. The removed preform 32 is subjected to a prescribed heat drying stage, where it is completely dried to give a pulp molded article.

Figs. 4 and 5 show a second embodiment of the papermaking mold according to the present invention. In these figures, numerical reference 101 indicates a papermaking mold.

As illustrated in Fig. 4, the papermaking mold 101, which is used as paired, has a papermaking block 102, a net 103 disposed on the surface of the papermaking block 102, and a frame 104. The papermaking block 102 has a block 120 which is rectangle in its plan view and a flange 121 which surrounds the block 120 from three sides. The frame 104 supports the papermaking block 102 from under the block 120 and the flange 121.

As shown in Fig. 5, the block 120 has a papermaking part 120a which is depressed in substantial conformity to a bottle container to be molded and a peripheral part 120b extending outward from the papermaking part 120a almost horizontally. The block 120 has a large number of interconnecting passages 120c which pierce the block 120 with their one end opening on the papermaking part 120a.

The flange 121 overhangs horizontally in three directions. In this embodiment, the upper side 121a of the overhanging flange 121 (this side will be sometimes referred to as a mating surface) is a surface on which a clamping force is exerted. The mating surface 121a has a groove 121b which depicts the shape of the letter "U" in its plan view. In this groove 121b is provided a sealing member 121c so that a pair of the

papermaking molds 101 may be mated with tight seal. The sealing member 121c is preferably made of a material having corrosion resistance and heat resistance, such as silicone rubber, urethane rubber or fluororubber. The sectional shapes of the groove 121b and the sealing member 121c are not limited to those shown. Since the papermaking mold 101 is used as paired, it is preferred that either one of the paired molds have the groove 121b and the sealing member 121c.

In the papermaking mold 101 according to the present embodiment, the block 120 and the flange 121 are formed of a first member and a second member, respectively. The second member is fixed to the sides of the first member by a prescribed fixing means, such as screwing, welding, and the like. The block 120 and the flange 121 are preferably formed of a metal such as aluminum.

The net 103 is provided along the surface of the papermaking part 120a and the peripheral part 120b. The net 103 is shaped in conformity to the contour of a vertical half of a molded article to be produced. The part 103a of the net 103 that covers the peripheral part 120b (this part of the net 103 will hereinafter be referred to as a peripheral covering part) is disposed in a site where it does not directly receive a mold clamping force exerted in mold closure or is not damaged by the clamping force (including a case in which the net undergoes neither deformation nor damage by the mold clamping force and a case in which the mated nets are brought into contact with each other and slightly deformed in a mold clamped state but are not damaged). More specifically, the site of the peripheral part 120b where the peripheral covering part 103a is to be disposed is lower than the upper side 121a of the flange 121 by a certain level difference d , in this embodiment. In a mold clamped state, the level of the peripheral covering part 103a of the net 103 is lower than the mating surface 121a. The level difference d is decided appropriately according to the thickness of the peripheral covering part 103a of the net 103 laid along with the peripheral part 120b in a mold clamped state and the thickness of an auxiliary sealing member (or a mold clamping force buffering member) 130 hereinafter described. From the standpoint of preventing flash formation, the height from the upper surface of the peripheral covering part 103a of the net 103 (in cases where an auxiliary sealing member (or a mold clamping force buffering member) is provided on the upper side of the peripheral covering part 103a as in the present embodiment, the height from the surface with no such an auxiliary sealing

member) to the upper side 121a of the flange is preferably in a range 0 to 5.0 mm, particularly 0 to 2.0 mm. When the height from the upper surface of the peripheral covering part to the height of the upper surface of the flange is 0 mm, the upper surface of the peripheral covering part of the net and the upper surface of the flange are even (the level difference d is equal to the thickness of the peripheral covering part of the net while along with the peripheral part 120b or, in the case of a knitted net, the thickness of the peripheral covering part with the knitted wires being along with the peripheral part 120b). In this case, although the peripheral covering parts of the two nets come into contact with each other in a mold clamped state, the clamping force is exerted on the upper surface of the flange but is not so directly exerted on the nets as to do damage to the nets. Therefore, in a mold clamped state, the peripheral covering parts of the nets can be brought into intimate contact without being collapsed. That is, the peripheral covering parts of the nets can be protected against damage while preventing the slurry from spewing therebetween. In this case, it is particularly preferred to provide the upper surface 121a of the flange 121 with the above-described sealing member 121c as in the present embodiment.

The peripheral part 103b of the net 103 is put into a gap 122 between the block 120 and the flange 121. A fixing plate 123 is disposed in the gap 122, which is pressed onto the side of the block 120 by a screw 124 through a threaded hole to fix the peripheral part 103b of the net 103. This manner of fixing the net 103 makes it easy to attach and detach the net 103, should the net undergo damage.

The net 103 is fabricated of metal or synthetic resin wire. The opening size is usually about 10 to 100 mesh (JIS L-0208). The net 103 may have a single layer structure, a knitted structure, or a composite structure composed of two or more net layers. A porous material having a large number of permeating pores which is formed by electroforming can be used as the net 103, in which case the diameter of the permeating pores is about 0.05 to 2 mm.

An auxiliary sealing member 130 having a prescribed width is provided integrally on the peripheral covering part 103a of the net 103. The auxiliary sealing member 130 is preferably provided on the upper surface of the peripheral covering part

103a of the net 103 with some thickness as a part integral with the net. So far as the sealing tightness in a mold clamped state is such that a slurry is prevented from oozing from between clamped molds in the papermaking step, the height of the upper side of the auxiliary sealing member 130 is not particularly limited, but is preferably larger than
5 the height of the mating surface 121a in a state before the molds are closed. The auxiliary sealing member 130 also serves as a mold clamping force buffering member which buffers the clamping force exerted on the peripheral covering part 103a of the net 103 in a mold clamped state. The auxiliary sealing member (or clamping force buffering member) 130 is preferably made of anticorrosive and heat-resistant materials
10 capable of elastic deformation, such as silicone rubber, urethane rubber, fluororubber, epoxy resins, etc. Even when the net 103 is deformed while a preform is pressed and dewatered in the step of papermaking and dewatering, the auxiliary sealing member made of such an elastically deformable material is capable of following the deformation while maintaining the tight fit as described later. The auxiliary sealing member 130
15 can be formed by heat press-bonding the material to the peripheral covering part 103a or coating or impregnating the peripheral covering part 103a with the material. Since the papermaking mold 101 is used as paired, it is preferred that either one of the paired molds have the auxiliary sealing member 130. While the auxiliary sealing member is a preferred member to be provided because of the above-mentioned effects, it may be
20 omitted where only the contact of the peripheral covering parts of the mating nets in a mold clamped state (as described above, this contact is such that the mold clamping force is not so directly exerted on the nets as to damage the nets) provides sufficient tight seal for suppressing flash formation without the aid of the auxiliary sealing member.

25 It is preferred that the net 103 be disposed with a prescribed clearance over the papermaking part 120a for preventing clogging by pulp fibers during papermaking and for improving papermaking efficiency.

The frame 104 has a box shape with an open top. The upper side wall of the frame 104 has a recess 140 into which the block 120 of the papermaking block 102 is
30 fitted. The left and the right sides of the frame 104 each have suction holes 142 which connect the inside and the outside of the frame 104. A sealing material 143 is provided on the top edge of the frame 104 so as to secure air- and liquid-tightness when

the papermaking block 102 is fitted thereto.

The papermaking block 102 and the frame 104 are removably fixed to each other by fitting the papermaking block 102 into the frame 104 and fastening a ring 144 fixed to the side wall of the frame 104 to a hook 121d fixed to the flange 121 of the papermaking block 102. Seeing that the papermaking block 102 is removably fixed to the frame 104, a changeover in kind of articles to be molded can be made simply by exchanging papermaking blocks 102 because the shape of the papermaking part 120 of the papermaking block 102 varies according to the shape of a pulp molded article to be produced. It is not necessary to make a whole papermaking mold for every shape of products.

With the papermaking block 102 fitted into the frame 104, a hollow chamber 105 is formed therebetween. The hollow chamber 105 connects to the outside through the suction holes 142 and to the papermaking part 120a through the interconnecting passages 120c of the block 120.

As described hereunder, the papermaking mold 101 according to this embodiment is used as paired with another half. A pair of the molds 101 are joined to mate the mating surfaces 121a thereby forming a cavity of prescribed shape, which is contoured by the two papermaking parts 120a. A pulp slurry is poured under pressure into the cavity to deposit pulp fiber on the net 103. Accordingly, while not shown, the pair to the papermaking mold 101 has the same structure.

The papermaking mold 101 can be used, for example, in the method of producing a pulp molded article shown in Figs. 6(a) through (d). As shown in Fig. 6(a), a pair of papermaking molds 101 and 101 are joined together with the papermaking parts 120a facing each other to mate the mating surfaces 121a. A cavity C of a prescribed shape is thus formed by the two papermaking parts 120a. A pulp slurry is injected into the cavity C through an opening connecting to the cavity C. In this state, the auxiliary sealing members 130 having an elastic force are in intimate contact with each other, but the mold clamping force is exerted on the mating surfaces 121 so that the nets 103 do not directly receive such a force as to damage the nets 103.

As a result, the peripheral covering part of the net undergoes substantially no deformation and can be protected from damage in repeated papermaking operation.

The cavity C of the molds 101 and 101 is evacuated by sucking through the interconnecting passages 120c, whereby the water content of the pulp slurry is removed outside, and the pulp fiber is deposited on the net (not shown) to form a water-containing preform 106.

On completion of injecting a prescribed amount of the pulp slurry, injection is stopped, and the cavity C is completely sucked for dewatering through the interconnecting passages 120c. An inflatable hollow pressing member 107 is inserted into the cavity C while continuing sucking and evacuating the cavity C through the passages 120c as shown in Fig. 6(b). The pressing member 107 is made of an elastic material, such as urethane, fluororubber, silicone rubber or an elastomer, or a plastic material, such as polyethylene or polypropylene.

As shown in Fig. 6(c), a pressurizing fluid is fed into the pressing member 107 to inflate the pressing member 107. The inflated pressing member 107 presses the wet preform 106 onto the net. The preform 106 pressed to the net by the pressing member 107, pressing and dewatering of the preform 106 proceed while the inner shape of the cavity C is transferred to the preform 106. Even if the net is elastically deformed during this step, the auxiliary sealing member provided on the peripheral covering part of the net follows the deformation to secure the tight seal. Thus, the inner shape of the cavity C can be transferred without flash formation. The pressurizing fluid used to inflate the pressing member 107 includes compressed air (heated air), oil (heated oil), and other various liquids. The pressure for the pressurizing fluid feed is preferably 0.01 to 5 MPa, particularly 0.1 to 3 MPa.

After the preform 106 is pressed and dewatered to a prescribed water content, and after the inner shape of the cavity C is sufficiently transferred to the preform 106, the pressurizing fluid is withdrawn from the pressing member to shrink the pressing member as shown in Fig. 6(d). The shrunken pressing member is taken out of the cavity, and the molds are opened to remove the preform 106 having been dewatered to a

prescribed water content. The removed preform 106 is subjected to a prescribed heat drying stage, where it is completely dried to give a pulp molded article.

With the papermaking mold 101 of the present embodiment, the peripheral covering part 103a of the net 103 is protected against direct contact with the mating surface of the complementary half in a mold clamped state. As a result, the peripheral covering part 103a of the net 103 hardly suffers damage from repeated mold opening and closure. The frequency of changing the damaged net for a new one is greatly reduced to considerably improve the working efficiency. Further, because the auxiliary sealing member 130 disposed on the peripheral covering part 103a of the net 103 secures tight seal, the slurry is prevented from oozing from between the mated peripheral covering parts 103a in the papermaking step. As a result, molded bottle articles having a satisfactory appearance with no substantial flashes on its outer surface can be obtained. Furthermore, since the net 103 is removably fixed, it is easy to attach and detach the net.

The present invention is not limited to the aforementioned embodiments. For example, the papermaking mold according to the present invention can have the configurations shown in Figs. 7 to 11. In Figs. 7 through 11, parts common to the papermaking mold 101 are given the same reference numerals, and the description thereof is omitted. Therefore, the explanation given to the papermaking mold 101 appropriately applies to the parts which are not specifically described hereunder.

The papermaking mold 101' according to the embodiment shown in Fig. 7 has an auxiliary sealing member 130 on both the upper and the lower sides of the peripheral covering part 103a of the net 103 with some thickness as a part integral with the net. In this embodiment the damage to the net which may be caused by the friction between the peripheral part 120b and the peripheral covering part 103a of the net 103 can be suppressed as well.

The papermaking mold 101' according to the embodiment shown in Fig. 8 has an auxiliary sealing member 130 on the lower side of the peripheral covering part 103a of the net 103 with some thickness as a part integral with the net, so that the mating

peripheral covering parts 103a are brought into contact with each other without a sealing failure upon mold clamping. In this embodiment the nets come into direct contact with each other at their peripheral covering parts 103a, but because the auxiliary sealing member 130 functions as a mold clamping force buffering member, the shock of contact of the peripheral covering parts 103a can be relaxed. As a result, damage from direct contact between the peripheral covering parts 103a of the nets 103 and damage from friction between the peripheral covering part 103a of the net 103 and the peripheral part 120b of the block 120 can be suppressed.

The papermaking mold 101' of the embodiment shown in Fig. 9 does not have a gap 122 as made in the papermaking mold 101. Instead, a groove 120d is formed on the surface of the peripheral part 120b, while the auxiliary sealing member 130 which is integral with the net 103 has a mating projection 130a which fits the groove 120d to fix the auxiliary sealing member 130 to the block 120. By this structure, the net 103 can be attached and detached more easily.

In the papermaking mold 101' of the embodiment shown in Fig. 10, an alteration is made to the position where to dispose the sealing member on the surface to be mated on mold clamping so that the peripheral covering part 103b of the papermaking net 103 may be disposed such that it would not be deformed under the mold clamping force. That is, a mating member 125 is provided outside the frame 104. It is not the upper side 121a of the flange 121 but the upper edge side 125a of the mating member 125 that serves as a surface to be mated on mold clamping. The side 125a has a groove 125b, in which a sealing member 125c is fixedly fitted. The upper side 121a of the flange 121 is lower than the upper edge side 125a of the mating member 125. On mold clamping, two mating nets 103 come into contact at their peripheral covering parts 103a, while the clamping force is received by the mating upper edge sides 125a. As a result, the net 103 does not directly receive the clamping force. Further, since the shock of contact is relaxed by the auxiliary sealing member 130, damage from the friction between the mating nets 103 is also reduced.

The papermaking mold according to the embodiment shown in Fig. 11 is designed so that the peripheral covering part 103b of the papermaking net 103 may be

disposed such that it would not be deformed under a mold clamping force and has a means for adjusting a mold clamping force. As for the papermaking mold 101' which is one of the paired papermaking molds (the lower one in Fig. 11), a plate 126 larger than the frame 104 is attached to the bottom (base) of the frame 104. The plate 126 has a plurality of through-holes 126a in at least the four corners. A nut 126b is put on the inner side of each of the through-holes. A bolt-like positioning member 126c which is male-threaded in conformity to the nut 126b is screwed in through the nut 126b, and a nut 126d is screwed tight on the positioning member 126c from the lower end of the positioning member 126c. The positioning member 126c has a depression 126e for positioning on its upper end surface (serving as a mating surface, on which a mold clamping force is exerted). The other papermaking mold 101" (the upper one in Fig. 11) has a plate 127 attached to the frame 104. The plate 127 has a projection 127e for positioning which fits the depression 126e for positioning. With this structure, even after the papermaking net 103 is fixed onto the block 120, the mold clamping force can be adjusted by the position of the positioning member 126c screwed in. That is, the means for adjusting a mold clamping force comprises the plates 126 and 127, the nuts 126b and 126d, and the positioning members 126c. The positioning members 126c may be threaded over the whole length thereof.

With this structure, even after the papermaking net 103 is fixed, the molding clamping force can easily be adjusted so that the peripheral covering part 103a of the papermaking net 103 is not deformed and that the peripheral covering part 103a (or an auxiliary sealing member 130 if provided on the peripheral covering part 103b) may secure tight seal to provide a flash-free molded article. Having the depression 126e and the projection 127e, the structure makes it possible to carry out positioning with good accuracy in clamping the molds.

The present invention is not limited to the foregoing embodiments. For example, in the first embodiment wherein the fixing member 16 is fixed to the peripheral part 13 by the engagement of the mating projection and the mating depression, the fixing member 16 can be fixed to the peripheral part 13 by screwing, adhesion with a strippable adhesive, or a like means.

In the first embodiment, a mating depression may be formed on the second part of the fixing member 16, and a mating projection may be formed on the peripheral part 13.

Although it is preferred that the block 120 having the papermaking part 120a and the upper side of the flange 121, on which a mold clamping force is exerted, be formed of a first member and a second member, respectively, it is possible to form these parts integrally.

While it is preferred that the auxiliary sealing member be integral with the net and be disposed on the peripheral part 120b of the block 120, it may be fixed directly into a groove made on the peripheral part 120b of the block 120 or may be adhered to the peripheral part.

In the embodiment shown in Fig. 11, a depression and a projection for positioning are formed on the positioning member 126c and the facing plate 127, respectively. Unlike this, in cases where the upper side 121a of the flange 121 serves as a mating surface (a surface on which a mold clamping force is exerted), the depression and the projection for positioning may be formed on the mating positions of the upper side of the flanges.

The papermaking mold according to the present invention is also applicable to a press mold for papermaking which is composed of a male mold and a female mold.

Industrial Applicability:

The present invention provides a papermaking mold the net of which can be attached and detached with improved ease.

Where a fixing member is integrally fixed to the net, the net has increased strength and is prevented from deformation and the like when attached or detached.

The papermaking mold of the present invention is prevented from damaging the net thereof when used for papermaking repeatedly.

CLAIMS

1. A papermaking mold which comprises a papermaking part of a prescribed shape, a peripheral part extending outward from the peripheral edge of said papermaking part, and a net covering said papermaking part and at least part of said peripheral part, wherein a fixing member is disposed on the periphery of said net, and said fixing member is fixed to said peripheral part to fix said net by said fixing member.
2. The papermaking mold according to claim 1, wherein said fixing member is integrally fixed to the part of said net that covers said peripheral part.
3. The papermaking mold according to claim 1, wherein said fixing member has a mating projection which fits in a mating depression made on said peripheral part to fix said fixing member to said peripheral part.
4. The papermaking mold according to claim 1, which is used as paired with another one in such a manner that the papermaking parts of the pair face each other and the fixing members of the pair are brought into contact with each other.
5. The papermaking mold according to claim 1, which is used as paired with another one in such a manner that the papermaking parts of the pair face each other so that said papermaking parts form a cavity of a prescribed shape in which a pulp slurry is to be injected to deposit pulp fiber on said net.
6. A papermaking mold which comprises a papermaking part of a prescribed shape, a peripheral part extending outward from said papermaking part, and a papermaking net covering said papermaking part and at least part of said peripheral part, wherein said part of the net which covers said peripheral part is disposed in the site where it does not receive a mold clamping force or it is not damaged by a mold clamping force.
7. The papermaking mold according to claim 6, wherein said site of said peripheral

part where said part of the net which covers said peripheral part is to be disposed is lower than a surface on which a mold clamping force is to be exerted by a certain level difference.

8. The papermaking mold according to claim 6, which has a means for adjusting a
5 mold clamping force.

9. The papermaking mold according to claim 6, wherein a sealing member is provided on said surface on which a mold clamping force is to be exerted.

10. The papermaking mold according to claim 6, wherein an auxiliary sealing
10 member or a mold clamping force buffering member is provided on said part of the net which covers said peripheral part or on said site of disposition.

09936600.120301

Fig. 1

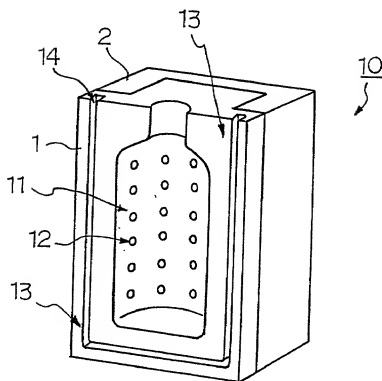


Fig. 2

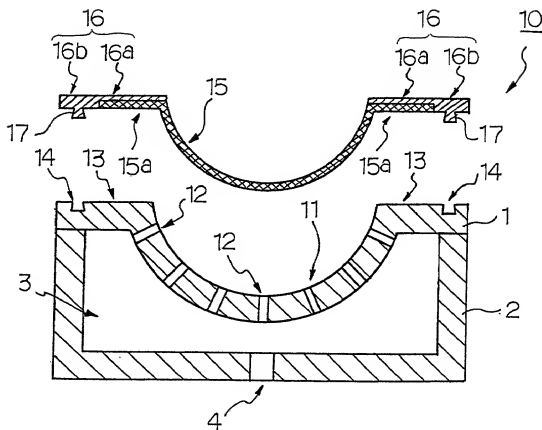


Fig. 3 (a)




Fig. 3 (b)




Fig. 3 (c)




Fig. 3 (d)






Fig. 4

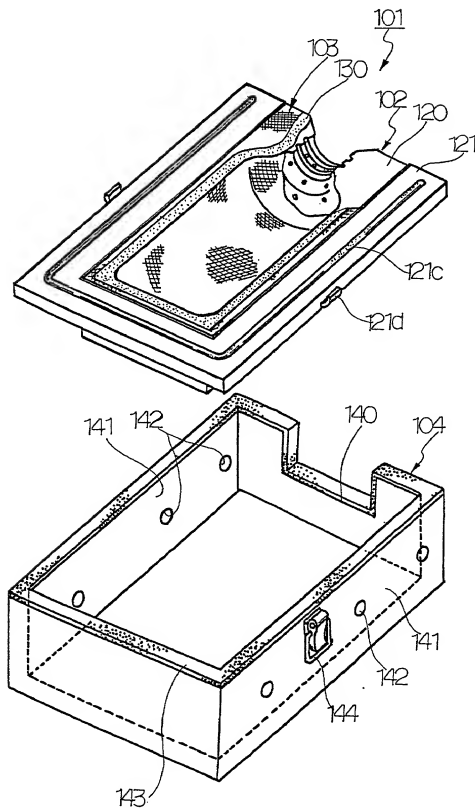


05926690.120301

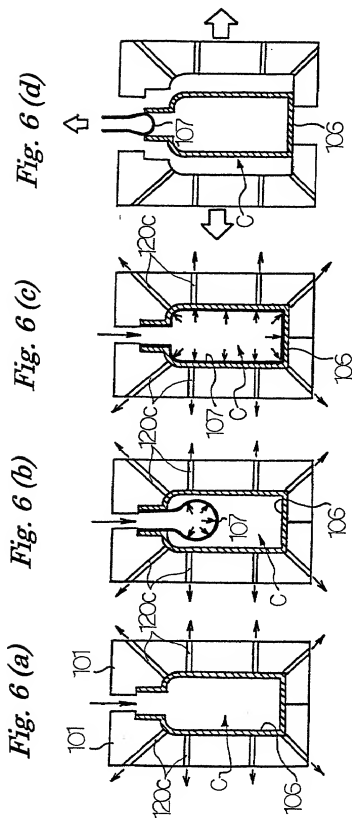

[illegible]

A cross-sectional view of a semiconductor device. It features a substrate 104 with a central region 105. A curved surface 101 is defined by a profile 102, with a radius of curvature 103. The surface is composed of segments 120a, 120b, and 120c. Various layers and structures are labeled: 121, 122, 123, 124, 125, 125a, 125b, 125c, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915,

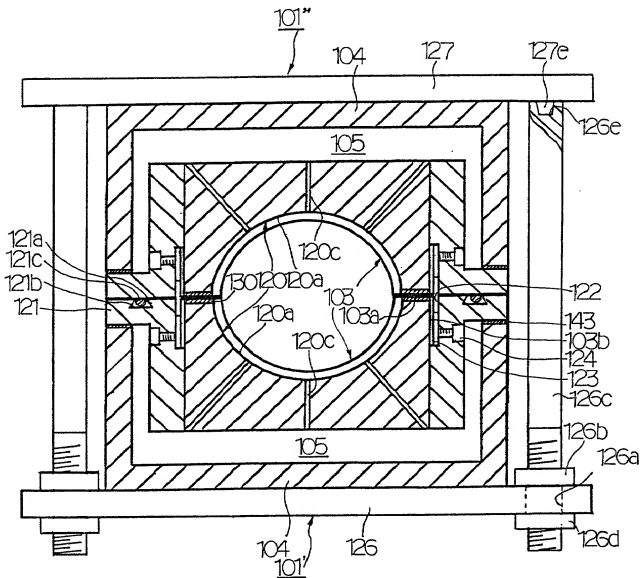

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条 (a) - (d) 項又は365条 (b) 項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365 (a) 項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)
外国での先行出願

<u>11-155642</u>	<u>Japan</u>
(Number)	(Country)
(番号)	(国名)
<u>2000-148955</u>	<u>Japan</u>
(Number)	(Country)
(番号)	(国名)

私は、第35編米国法典119条 (e) 項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国を指定している特許協力条約365条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外の特許提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

私は、私自信の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed
優先権主張

<u>2/June/1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(出願年月日)	はい	いいえ
<u>19/May/2000</u>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(Day/Month/Year Filed)	Yes	No
(出願年月日)	はい	いいえ

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

<u>(Application No.)</u>	<u>(Filing Date)</u>
(出願番号)	(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

<u>(Status: Patented, Pending, Abandoned)</u>
(現況: 特許許可済、係属中、放棄済)

<u>(Status: Patented, Pending, Abandoned)</u>
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

上記発明の明細書は、

☐ 本書に添付されています。

☐ 月 日 に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

"PAPERMAKING MOLD"

the specification of which

☐ is attached hereto.

☒ was filed on May 30, 2000
as United States Application Number or
PCT International Application Number
PCT/JP00/03475 and was amended on
_____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration

(日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。

(弁理士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

Norman F. Oblon, Registration Number 24,618; Marvin J. Spivak, Registration Number 24,913; C. Irvin McClelland, Registration Number 21,124; Gregory J. Maier, Registration Number 25,599; Arthur I. Neustadt, Registration Number 24,854; Richard D. Kelly, Registration Number 27,757; James D. Hamilton, Registration Number 28,421; Eckhard H. Kuesters, Registration Number 28,870; Robert T. Pous, Registration Number 29,099; Charles L. Gholz, Registration Number 26,396; Vincent J. Sunderdick, Registration Number 29,004; William E. Beaumont, Registration Number 30,996; Steven B. Kelber, Registration Number 30,073; Robert F. Gruse, Registration Number 27,295; Jean-Paul Lavalleye, Registration Number 31,451; Stephen G. Baxter, Registration Number 32,884; Martin M. Zoltick, Registration Number 35,745; Robert W. Hahl, Registration Number 33,893; Richard L. Treanor, Registration Number 36,379; Steven P. Weihrhous, Registration Number 32,829; John T. Gookasian, Registration Number 26,142; Marc R. Labgold, Registration Number 34,651; William J. Healey, Registration Number 36,160; Richard L. Chinn, Registration Number 34,305; Steven E. Lipman, Registration Number 30,011; Carl E. Schler, Registration Number 34,426; James J. Kulbaski, Registration Number 34,648; Catherine B. Richardson, Registration Number 39,007; Richard A. Neifeld, Registration Number 35,299; and J. Derek Mason, Registration Number 35,270, with full powers of substitution and revocation.

書類送付先

Send Correspondence to:

OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.
FOURTH FLOOR
1755 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202 U.S.A.

直接電話連絡先：(名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

(703) 413-3000

唯一または第一発明者名	1800	Full name of sole or first inventor Kenichi OTANI
発明者の署名	日付	Inventor's signature Kenichi Otani Date November 15, 2001
住所		Residence TOCHIGI, JAPAN JPX
国籍		Citizenship Japanese
私書箱		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN
第二共同発明者	200	Full name of second joint inventor, if any Yoshiaki KUMAMOTO
第二共同発明者の署名	日付	Second Inventor's signature Yoshiaki Kumamoto Date November 15, 2001
住所		Residence TOCHIGI, JAPAN JPX
国籍		Citizenship Japanese
私書箱		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN

(第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

Japanese Language Declaration

(日本語宣言書)

第三の共同発明者の氏名	日付	Full name of third joint inventor, if any Tokuo TSUURA	Date
第三の共同発明者の署名		Third joint inventor's signature <i>Tokuo Tsuura</i>	<i>November 15, 2001</i>
住所		Residence TOCHIGI, JAPAN	<i>JPX</i>
国籍		Citizenship Japanese	
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN	

第四の共同発明者の氏名	日付	Full name of fourth joint inventor, if any Minoru GOTO	Date
第四の共同発明者の署名		Fourth joint inventor's signature <i>Minoru Goto</i>	<i>November 15, 2001</i>
住所		Residence TOCHIGI, JAPAN	<i>JPX</i>
国籍		Citizenship Japanese	
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN	

第五の共同発明者の氏名	日付	Full name of fifth joint inventor, if any Keiji ETO	Date
第五の共同発明者の署名		Fifth joint inventor's signature <i>Keiji Eto</i>	<i>November 15, 2001</i>
住所		Residence TOCHIGI, JAPAN	<i>JPX</i>
国籍		Citizenship Japanese	
郵便の宛先		Post Office Address c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, TOCHIGI 321-3426 JAPAN	

第六の共同発明者の氏名	日付	Full name of sixth joint inventor, if any	Date
第六の共同発明者の署名		Sixth joint inventor's signature	
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post Office Address	

(第六またはそれ以降の共同発明者に対しても同様な情報および署名を提供すること。)

(Supply similar information and signature for third and subsequent joint inventors.)